

# Content

Installation.....	2
Copying on the SD-card.....	2
Installation.....	2
De-install.....	2
Install.....	3
New Firmware.....	3
User Manual.....	4
Views.....	4
Properties.....	5
StartPage.....	5
Settings.....	5
MackxHack.....	6
LastApps.....	6
Adding New Views.....	7

## Installation

This section describes the installation and de-installation procedure for the Mackx-Hack for the DR1000. Note that the hack changes part of the firmware and might thus make the software more unstable. As indicated on the MobileRead forum, it should always be possible to revert back to an original firmware by copying the firmware-installation-files on the SD-card and then resetting the device.


### Copying on the SD-card

The first step is to copy the files to the correct location on your SD-card. The zip-file with the files for the patch should be extracted on the root of the SD-card.

### Installation

The copied files contain the (de-)installation script. If you upgraded to a new firmware version and want to install the hack again, then first read the New Firmware-section below!

The installation-script can be started by double clicking on the 'Install Mackx Hack' icon. The icon is located in Programs/Install, browse to it using the SD Card-view. See the picture below.

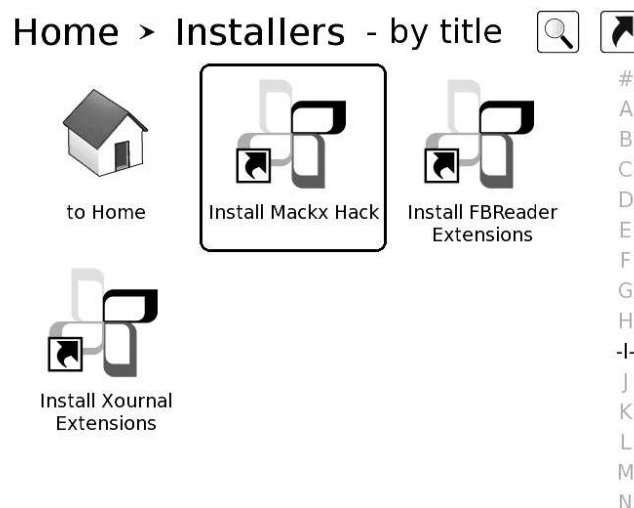

Note that the picture shows the Installers-View which is not yet available when the hack is not yet installed.

### De-install


When you have already installed the hack before and are now upgrading to a newer version, the installation script will ask you if you want to de-install the existing version. De-installation is not required when upgrading so only select this when you want to remove the hack and go back to the original firmware.




Select OK to start the de-install and Cancel to continue with installation.

## Install

The next pop-up will ask you if you really want to install the hack.

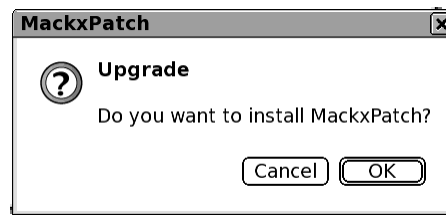

Choose OK to continue. The installation contains two parts: installation of gconf-schemas for the new views and installation of the changed firmware. You can choose if the gconf-schemas should be installed (again), installation is not mandatory if they have not changed.

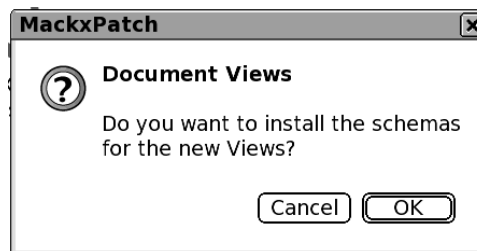

The installation of the changed firmware component will not lead to an extra pop-up, there will only be a pop-up to indicate that the installation has finished and that a reboot of the device is required to use the changed files.



After clicking OK the device will reboot. This might give some strange effects on the screen, but everything should be normal again within a minute.

## New Firmware

The installation-script copies the 'current'-versions of the firmware components that are replaced to the SD-card. These will be used during de-installation. A problem occurs when a new firmware version is installed with first de-installing the hack. After the firmware-upgrade, the SD-card still contains the 'original'-versions of the old-firmware, so when de-installing, the old-versions will be used and not the correct ones from the new firmware.

There are two solutions to this problem:


- 1) De-install the hack before installing new firmware.
- 2) Remove the old-firmware backups before installing the patch for the new firmware. They are located in: Programs/\_mackxpatch/ and called: ctb\_original; popupmenu\_original; sysd\_original; libermetadb\_original and globaldb\_original;

# User Manual

This section describes how to use and configure the changes that are made with the hack.

## Views

The Home-screen that is normally shown after start-up contains a selection of Views. Each view shows some part of the content of the SD-card (or some internal data) with its own sorting, grouping and appearance. The firmware is changed to support some extra views. Some of them are added during the install, but you can also add your own views.

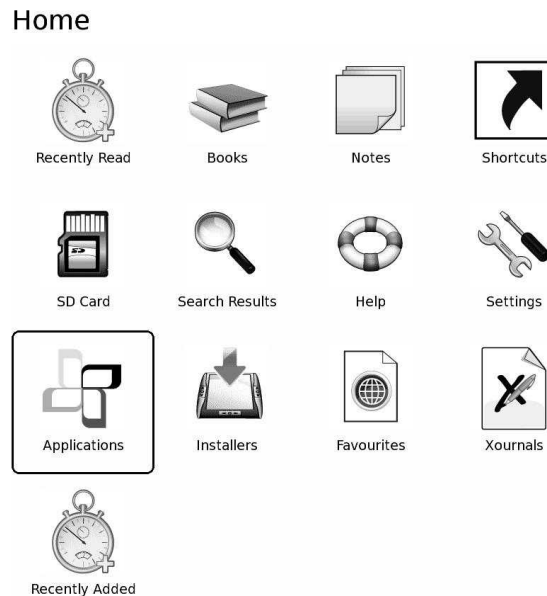

The picture shows a modified Home-screen with some extra added views. Some 'standard' views are not shown anymore. The new views are:

- Recently Read: The standard view shows the recently added documents, this view shows the recently read document. This makes it easy to find the document you where reading the last time you used the DR.
- Application: This view shows all items on the SD-card that are marked as 'application'. See the Properties-section below on how to mark items.
- Installers: This view shows all items on the SD-card that are marked as 'install'. See the Properties-section below on how to mark items.
- Favourites: This view shows all items on the SD-card that are marked as 'fav1'. See the Properties-section below on how to mark items.
- Xournals: This view shows all items on the SD-card that are marked as 'xournal'. See the Properties-section below on how to mark items.

As indicated most new views need some extra work before they can be used sensibly.


## Properties

A new menu item has been added, named 'Properties'.



After selecting a document (by using the up/down/right/left-keys) bring-up the menu. You will see the new item. Select it and you will get a dialog to modify the 'tag' for the document. This tag is used by the DR to mark documents as a specific type of document. The tags that are used by the standard firmware are: book; image; news; personal; help; and note.

The new views also support more tags, see the previous section.

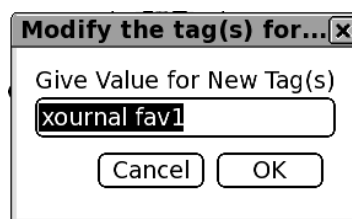

The original firmware only allows one tag per document, the hacked firmware allows multiple tags to be assigned to a document.

## StartPage


With the original firmware, after start-up the Home/Desktop is shown. The hack allows this behaviour to be changed. There is another new menu-item called 'Set as StartPage'. When this menu-item is selected, the current view will be shown at the next restart. This allows for example to start with the Recently Read-View.

## Settings

Some of the changes to the firmware can be configured, to do this two extra settings dialogs are added. Navigate to the Settings-View to start them.

## MackxHack

This dialog allows to configure the Home/Desktop view.

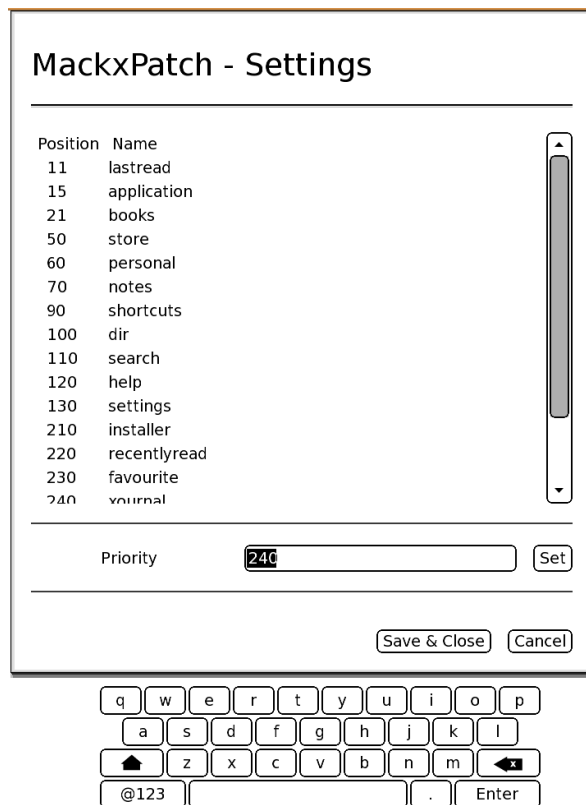


The dialog shows a list of views of the Home-screen, in front of the name is a number, which is used to determine its position. The view with the lowest number is shown first. When the number is zero, the view will not be shown.

To change the position of a view:

- Double click on the view. The priority will now be shown in the edit-box at the bottom of the dialog.
- Determine its new position and enter the value.
- Select the Set-button to activate your choice.
- Multiple items can be changed in this way
- When finished make sure to choose 'Save & Close' to apply the changed settings.

## LastApps

This dialog allows to configure the behaviour for the last-app functionality. The last-app functionality has two parts: the start-up behaviour and the card-removal behaviour.

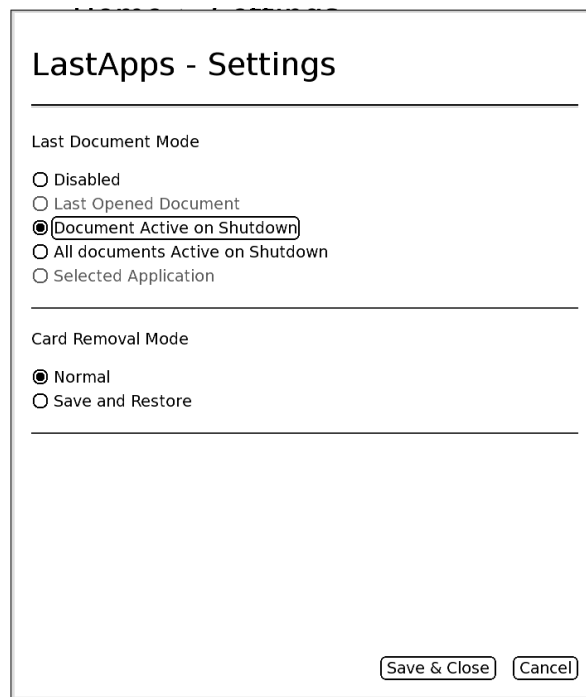

**Last Document Mode:** controls the startup behaviour.

- Disabled: do not start any document at startup.
- Document Active on Shutdown: Start the document that was active on top of the screen (i.e. visible) when the DR was shutdown.
- All documents Active on Shutdown: All document that where 'active' (i.e. shown in the TaskBar at the right side of the screen) are opened after start-up.

The other options are not implemented and can not be choosen.

**Card Removal Mode:** controls the behaviour after card removal/re-insertion.

- Normal: normal behaviour do nothing extra
- Save and Restore: Remembers the open documents (shown in the TaskBar) when the SD-card is removed (with menu-item 'Safely Remove') and re-opens these documents again when the card is re-inserted.

## Adding New Views

It is also easy to add your own views, you only need to create a new schema-file (and install it). The easiest way is to modify an existing one. See `Programs\_mackxpatch\schemas\`.

This is an example using the `favourites.schema` file. Lets assume you want to create a view to only see those documents that are required for ProjectX.

- Copy `favourites.schema` to `projects.schema`
- Search for all occurrences of 'favourite' and change them to 'projectx' or 'ProjectX Files' depending on the context. E.g. `<key>/schemas/apps/er/patch/ctb/views/projectx/title</key>` and `<default>ProjectX Files</default>`
- Look for the 'tag\_filter'-key and change 'fav1' to 'projx'.
- The 'position'-key can be used to change the position at which the new view should appear in the Home-screen. (Can later be changed in Settings.)
- See `Programs\_mackxpatch\_apply.sh` how to create a script to add a new schema-file. You

need to reset for the firmware to detect the new view and show it.

The 'style'-key determined the basic behaviour of the view. Only a limited 'styles' are supported, it is best to only use 'tag' for your own views.